


DUMUZAS®



*Version 2019

**Trusted and reliable Roofing Product
from Mabati Rolling Mills Limited**

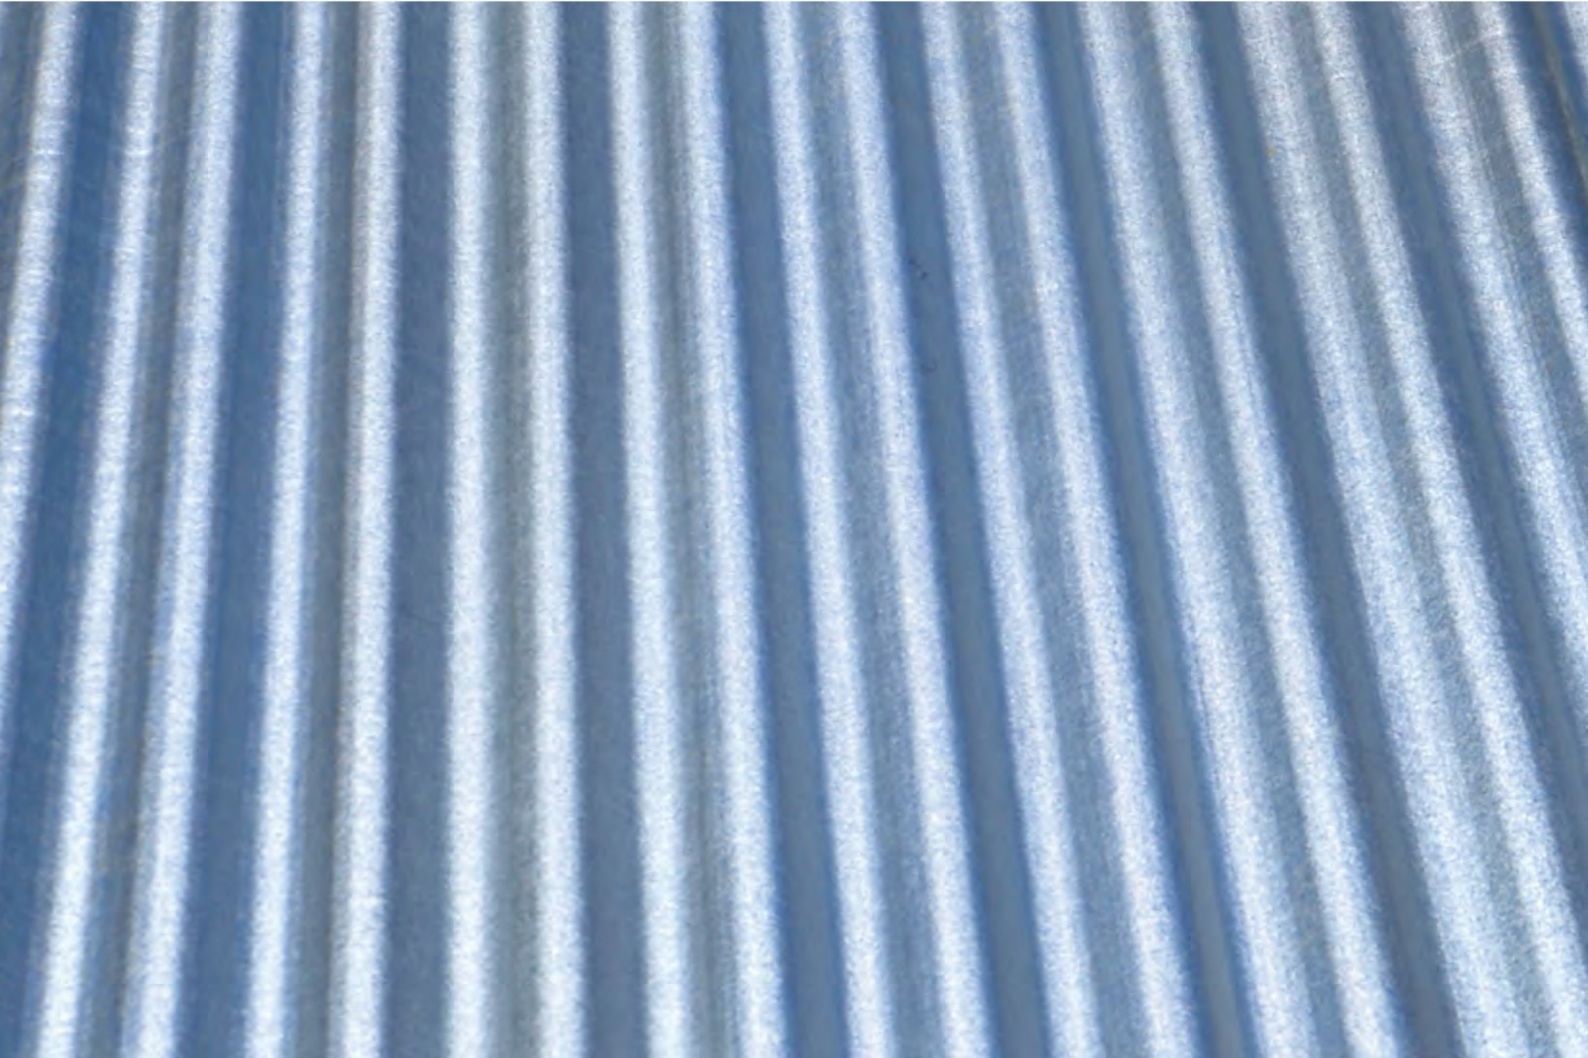


Dumuzas is a revolutionary brand made from high tensile steel that has a protective metal coating of 55% Aluminium, 43% Zinc and 1.6% Silicon, resulting in a product with an extremely long life. Now with thin organic coating (TOC). The New Dumuzas has increased durability and a beautiful silver finish. It has a corrugated profile with 11 ribs and a pitch [distance between ribs] of 76.2mm. It is mainly used for roofing and walling in domestic applications. It comes with matching accessories for a complete roofing solutions.

Features and benefits

- Lasts longer than a Zinc galvanized product of the same coated thickness.
- Offers up to 4 degrees' cooler interiors.
- Has a shining beautiful silver finish.
- It is very easy to install.

Specifications

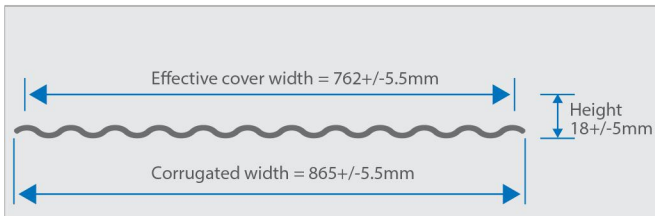

Normal Corrugation 110 (NC 110) is a sinusoidal profile with 11 corrugations and a pitch (distance between any two crests) of $(76 \pm 2 \text{ mm})$ hence its name, and is the oldest commonest of all profiles, mainly used for roofing and walling especially in domestic applications.

Purlin Spacings

Purlin Spacings are dependent on both downward loading and negative suction loading caused by wind. Your engineer should be consulted to calculate your load $[\text{kN/m}^2]$ for your particular application.

Fixing Procedure

Lay each run of sheets in turn from side to side before moving onto the next run as depicted below. Similar procedure for wall cladding too.

