



# ELEGANTILE



\*Version 2019

**Premium Steel Roofing Tiles for an elegant finish, modern look and unrivalled durability from Mabati Rolling Mills Limited**




# ELEGANTILE

**Elegantile** combines an aesthetic from the royal Romanesque palaces with the graceful curves of a grounded tile form.

## Specifications

- Overall width: 1,128mm +/- 5mm
- Effective cover width: 1,050mm +/- 5mm
- Length/Square Meter: 953mm
- Overall width: 1,128mm +/- 5mm
- Effective cover width: 1,050mm +/- 5mm
- Length/Square Meter: 953mm

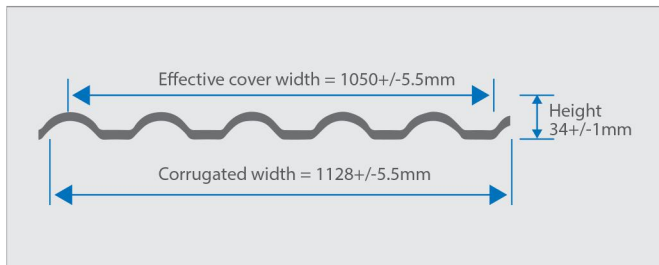

- **Lengths:** 600mm upwards in multiples of 300mm  
Maximum recommended length for 0.32mm is 6m
- **Base material:** ZINCAL© coils made using world class patented metal coating technology
- **Paint systems:** Color Plus Textured and optima
- **Finish:** Gloss or Textured
- **Thickness:** 0.32mm, 0.4mm, 0.5mm, 0.6mm (+/- 10%)  
Minimum 0.3mm(28g)  
Maximum 0.60mm (22g)

## Material options

- **Aluminium- Zinc:** Gauge (mm)  
AZ85, AZ100-AZ 150 0.32 0.40 0.50 0.60

Elegantile is rolled in soft material only- G275

- **Input coil width:** 1220mm
- **Profiled sheet width (overall width):** 1128mm
- **Rib to Rib width i.e.: Pitch:** 210mm
- **Depth of each tile (Step to Step):** 300mm
- **Effective cover width:** 1050mm
- **Purlin spacing:** 600mm

## Roof pitch

Elegantile can be used on a roof pitched from as low as 15degrees

## Purling spacing


Battens / purlins should be spaced at 300mm on both ridge and eave (i.e.: at every tile step), and at maximum 600mm (i.e.: at every second tile step) internal spans, although battens at every step will be stronger.

## Note:

During installation, clean the roof daily by removing all swarf, pop rivets and unused fasteners or any other debris.

## Features:

- **Sheets**
  - Continous length profile increases visual uniformity
  - Reduces chance leakage
  - Lightweight safer to lift and install while enabling the supporting structure to be less bulky/costly
- No underlays needed
- Rapid roof coverage
  - Large panel size enables roofing to be completed faster
  - Easy and secure - roofing sheets are fixed to the roof structure
- World class patented coating technology
- MRM Mark of Quality - each sheet is inspected over 6 times before dispatch
- Engineered to prevent leakage by capillary action

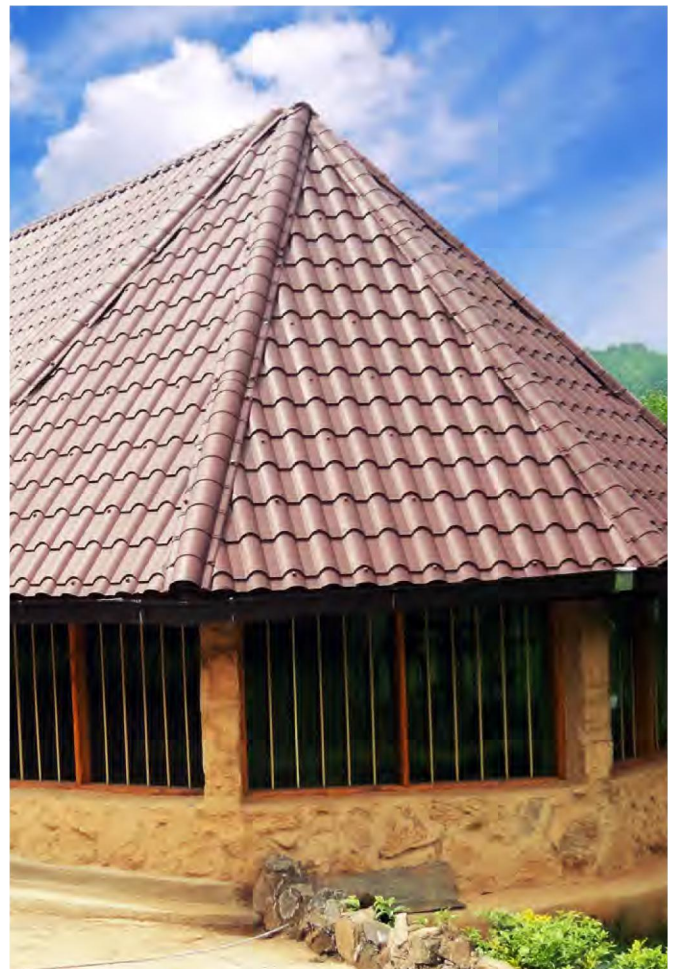

DARK GREEN



TILE RED



MAROON



BRICK RED



CHARCOAL



CHOCOLATE



AQUA GREEN



GRAPHITE GREY